

# BASE STATION RADIO GUIDE

## EMERGENCY MAIN BASE STATION

### Channel 1 – School Site Local Campus Channel (SCHOOL NAME)

When you transmit: This channel will communicate with your local campus and assigned School Sites during the Inter Campus Radio Test.\*

### Channel 2 – School Police Channel (POLICE DIG)

When you transmit: This channel will communicate with School Police Dispatch

### \* During the Inter-Campus Radio Test:

In order for your Assigned Reporting Schools Sites to reach you Via Two Way Radio.

1. They MUST be using their Emergency Radio Located in the Main Office.

2. They MUST be on Channel 2 and it shows EMERGENCY on the display

DISPLAYS CHANNEL  
INFORMATION

VOLUME  
CONTROL

CHANGES  
CHANNELS

1. LOCAL CAMPUS  
(SCHOOL NAME)

2. SCHOOL POLICE  
(POLICE DIG)



GREEN – NORMAL

YELLOW – BATTERY CHARGING  
AFTER POWER OUTAGE

RED - NOT NORMAL – PLEASE  
CONTACT THE RADIO UNIT

BUTTON WITH  
LIGHTNING BOLT

PTT- PUSH AND HOLD  
TO TALK. RELEASE TO  
LISTEN



# HANDHELD EMERGENCY RADIO GUIDE

## EMERGENCY HANDHELD

### Channel 1 – School Site Local Campus Channel

When you transmit: This channel will communicate with your local campus. Please use Stationary Base Station in the Main Office to call you assigned Sites during the Drill.

### Channel 2 – School Police Channel (POLICE DIG)

When you transmit: This channel will communicate with School Police Dispatch

### Charging your Battery:

Charge battery with Radio OFF


Radio will hold a charge for 10-12 Hours with a FULL charge.

ON/OFF  
KNOB &  
VOLUME  
CONTROL




CHANNEL CONTROL  
KNOB

PTT- PUSH AND HOLD  
TO TALK.  
RELEASE TO LISTEN

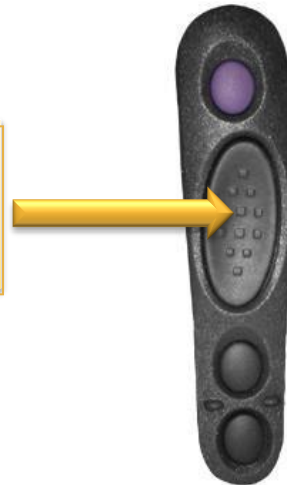

PUSH TO DISPLAY  
BATTERY STATUS  
RATED CAP%  
PERCENTAGE OF  
BATTERY CHARGE

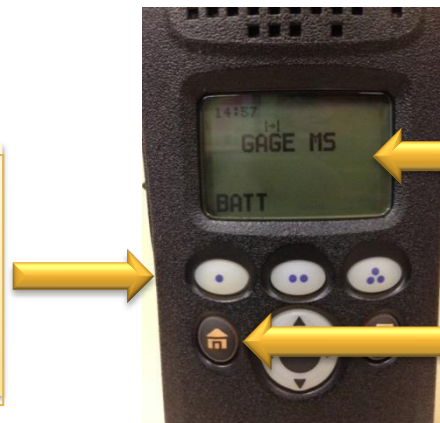

DISPLAYS CHANNEL  
INFORMATION

HOME BUTTON: CLEARS  
OUT OF BATTERY  
STATUS SCREEN